

# DIAMONDBACK LED MODULES



## Features

- Powered by high output 2835 LED.
- Constant voltage .
- Diamondback 170° optic lens.
- 20 PCS per string
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

## Application

- Apply to 4–15 cm depth illuminate letter or light box at airports, metros, banks, buildings and shopping malls, etc.


## Parameters

Items	Parameters			
Part Number	ZE01BA3	ZE02BA3	ZE03BA3	ZE04BA3
CCT (K)	7000K	7000K	7000K	7000K
Beaming Angle (°)	170°	170°	170°	170°
CRI (Ra)	≥75	≥75	≥75	≥75
Luminous Flux (lm)	40	80	120	160
Voltage (V)	DC12	DC12	DC12	DC12
Power (W)	0.4	0.8	1.2	1.6
Driving Method	Constant voltage	Constant voltage	Constant voltage	Constant voltage
Dimension (mm)	36*17.5*6.2	56*17.5*6.2	80*17.5*6.2	45*43*6.2
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP66	IP66	IP66	IP66


## Dimension

Unit: mm


ZE01BA3

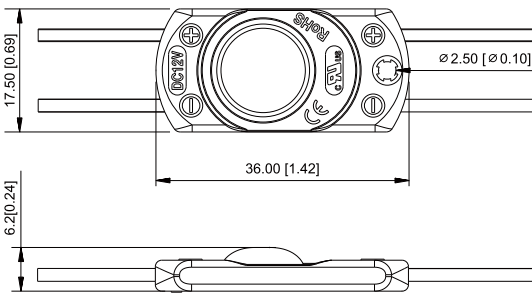

ZE02BA3

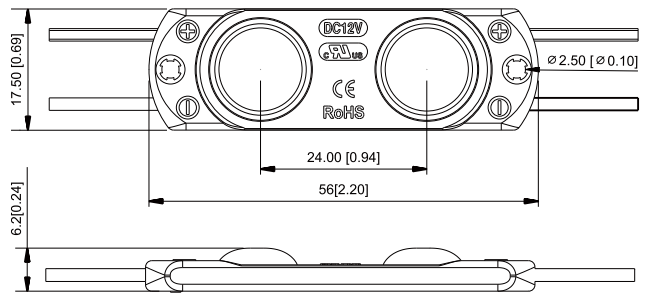

ZE03BA3

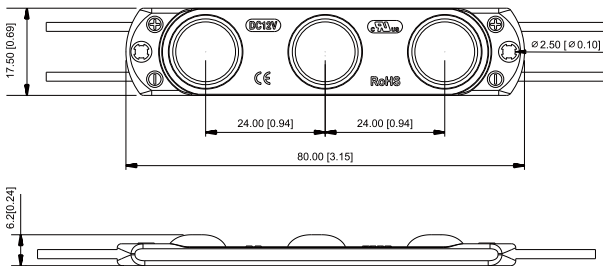

ZE04BA3

