


# HIGH LIGHT EFFICACY LED MODULES

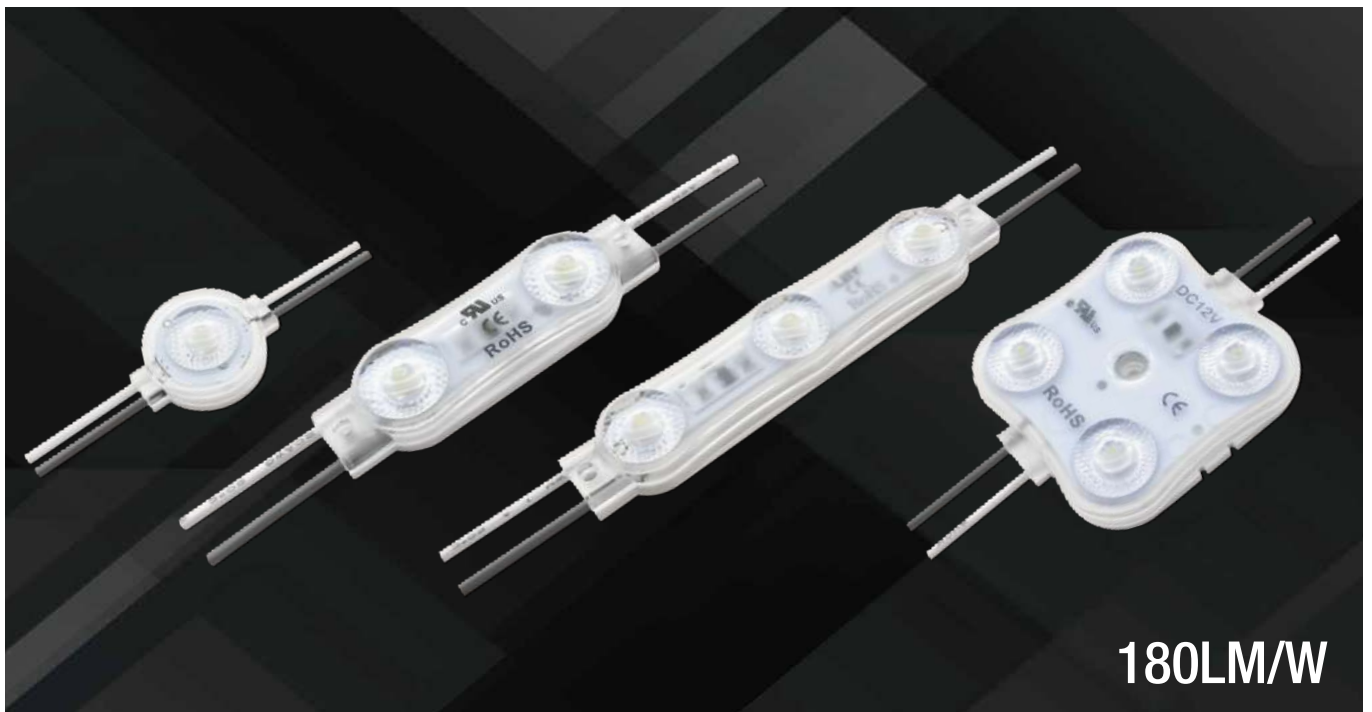

## Features

- Powered by high output 2835 LED.
- Constant current.
- Integrated transparent 170° optic lens.
- 20 pcs per string.
- CE, RoHS,UL,TUV, BIS, CB and LM-80 certified.

## Application

- Apply to 4–15 cm depth illuminate letter or light box at airports, metros, banks, buildings and shopping malls, etc.



## Parameters

Items	Parameters			
Part Number	ZE01CB3	ZE02CB3	ZE03CB3	ZE04CB3
CCT (K)	6500K	6500K	6500K	6500K
Beaming Angle (°)	170°	170°	170°	170°
CRI (Ra)	≥70	≥70	≥70	≥70
Luminous Flux (lm)	65	130	195	215
Voltage (V)	DC12	DC12	DC12	DC12
Power (W)	0.36	0.72	1.08	1.2
Driving Method	Constant current	Constant current	Constant current	Constant current
Dimension (mm)	25*20*10.3	50*14.6*10.3	76*14.6*10.3	48*44*10.3
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP66	IP66	IP66	IP66



## Dimension

Unit: mm



### ZE01CB3



### ZE02CB3

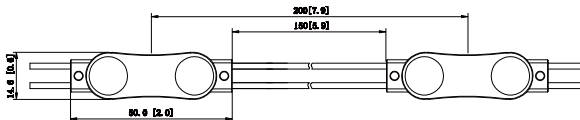

### ZE03CB3



### ZE04CB3

