



## PLDC-P1JS-8P1JP-300

**1 YEAR  
WARRANTY**


DC Splitter Lead

100% Functional Tested

RoHS Compliant





|                              |                            |                              |                    |
|------------------------------|----------------------------|------------------------------|--------------------|
| <b>Cable Size</b>            | 20AWG                      | <b>Length</b>                | 300mm              |
| <b>Connector A</b>           | 2.1/5.5mm Socket           | <b>Connector B</b>           | 8 x 2.1/5.5mm Plug |
| <b>Wire Colour</b>           | Black                      | <b>Barrel length</b>         | 11±0.5             |
| <b>Insulation Resistance</b> | 10M Ω MIN / DV 300V / 10ms | <b>Conducting Resistance</b> | 1 OHM Max          |
| <b>Max Rating</b>            | 6A                         |                              |                    |

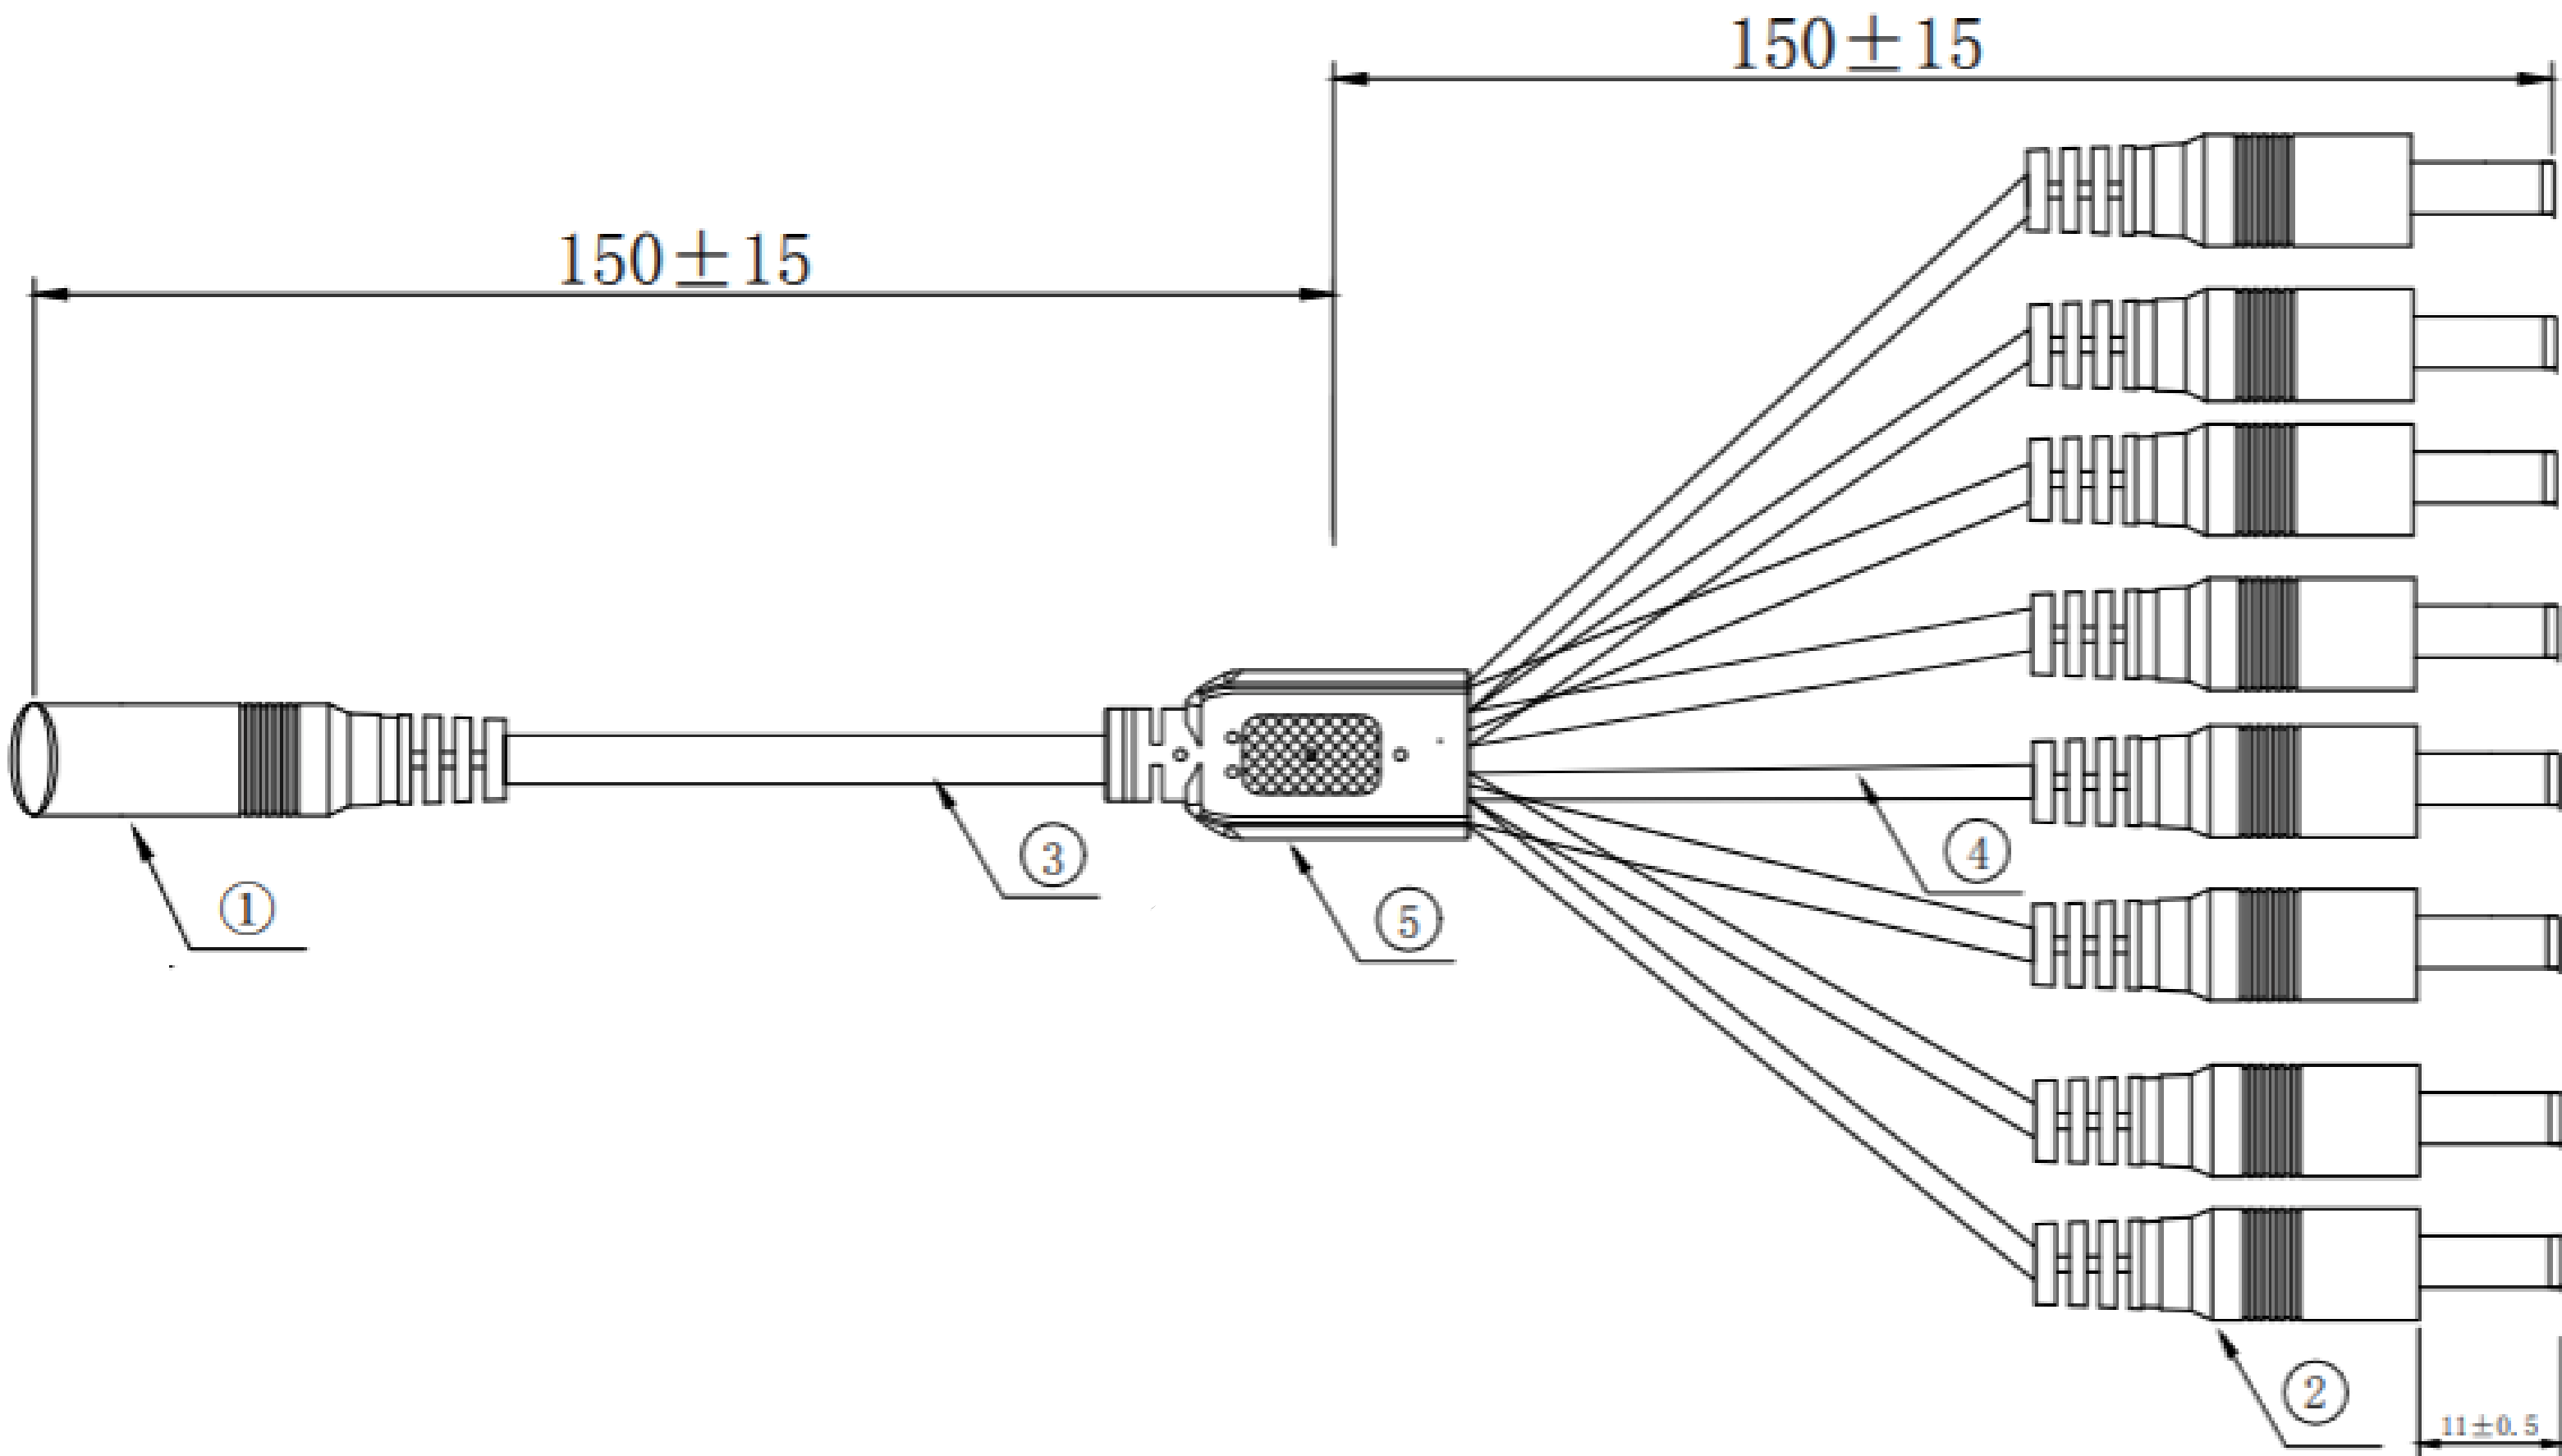

**Connector A**

**Connector B**

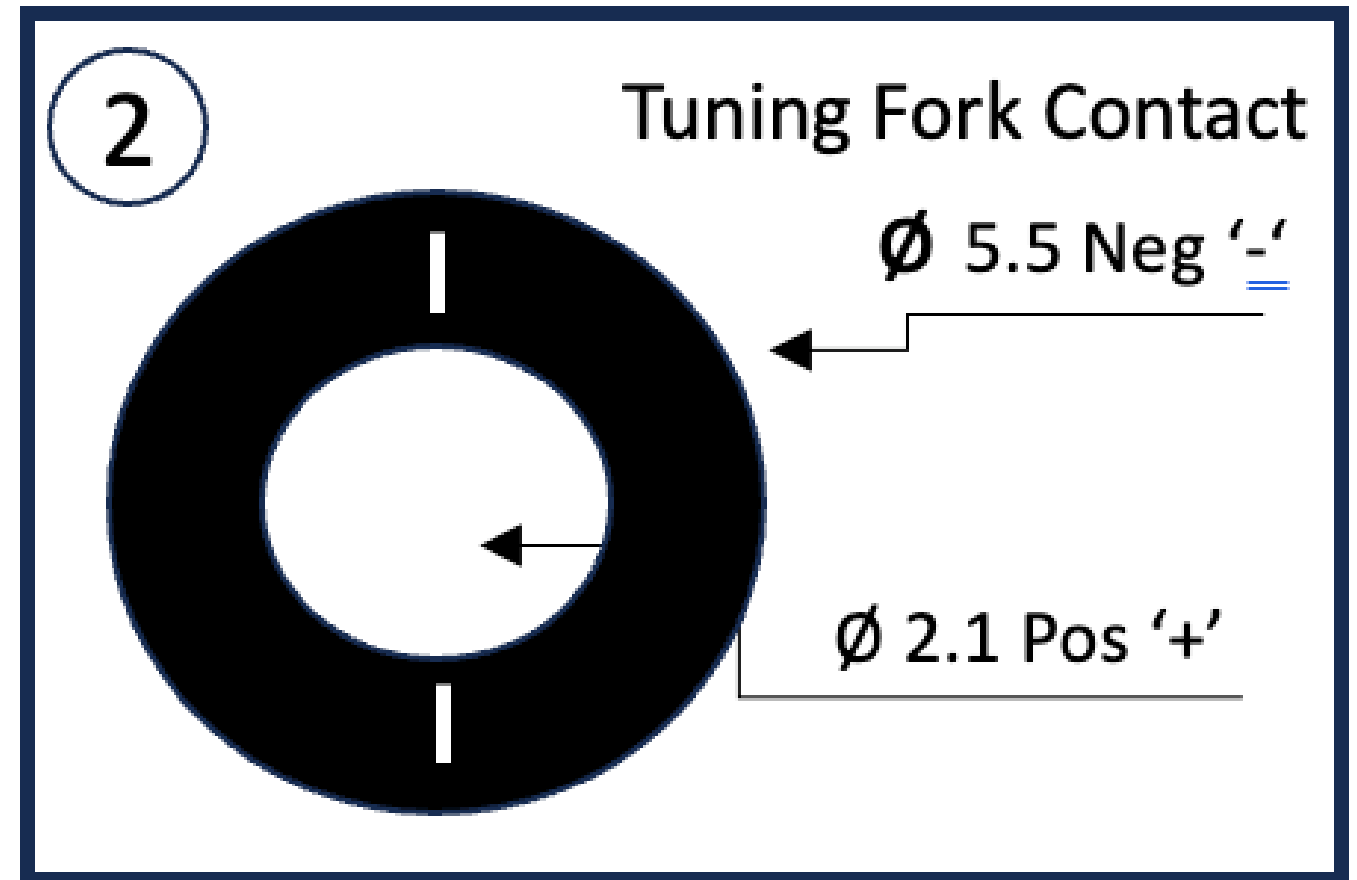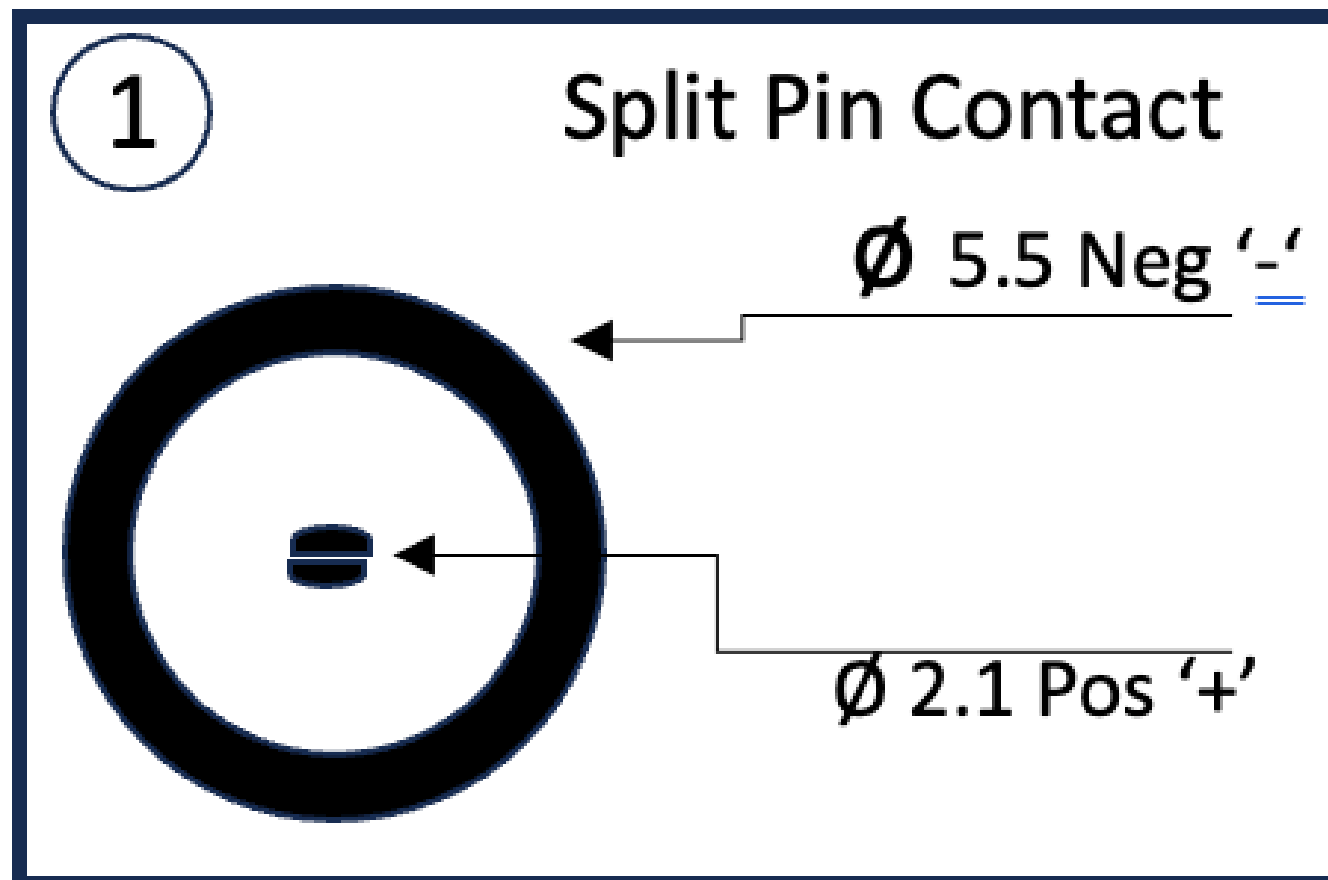

|   |       |  |     |     |
|---|-------|--|-----|-----|
| ① | CONN  | SPLIT PIN CONTACT FEMALE                   | 1   | PCS |
| ② | CONN  | TUNING FORK CONTACT MALE                   | 8   | PCS |
| ③ | CABLE | UL2464#20AWG*2C OD:4.0MM BLACK PVC L=150MM | 150 | MM  |
| ④ | CABLE | UL2464#24AWG*2C OD:3.0MM BLACK PVC L=150MM | 150 | MM  |
| ⑤ | CONN  | BLACK SR                                   | 1   | PCS |